





800-299-2645 Toll Free
205-838-5958 Office
205-838-5990 FAX


24 Hour Service

CUSTOMER _____ P.O. BOX/ST. NO. _____ CITY _____ STATE _____ CONTACT _____ PHONE # _____ FAX _____ P.O. NUMBER _____ DATE ORDERED _____ S.T. _____ RUSH _____ O.T. _____ SHIP VIA _____	CMI JOB # _____ <hr/> MFG. _____ H.P./K.W. _____ R.P.M. _____ FRAME _____ VOLTS _____ AMPS _____ MODEL _____ TYPE _____ PHASE _____ HZ _____ TEMP. RISE _____ S/N _____ SVC. FACTOR _____
---	---

1. Core bore (Diam) _____
 2. Core length _____
 3. Finger width _____
 4. Top straight length _____
 5. Bottom straight length _____
 6. Front extension _____
 7. Rear extension _____
 8. Total coil length _____
 9. Front ring extension _____
 10. Front ring drop _____
 11. Rear ring extension _____
 12. Rear ring drop _____
 13. Tooth width _____
 14. Below slot iron _____
 15. Knuckle lift _____
 - 15a. Small drop _____
 - 15b. Large drop _____
- Throw direction: Right or Left
 Lead location 16. 17. or 18.
 Coil span: 1 & _____
 Jumper conn. 1-4 or 1-7
 Number of circuits and connection:
 _____ Wye / Delta (circle one)
 Grouping _____
 Coil pin diameter(s) _____
 Bare wire width _____
 Bare wire thickness _____
 Wires in hand _____
 Arrangement _____ X
 No. turns _____
 Strand insul. (type & build) _____
 No. slots _____
 Coil weight (pounds) _____
19. Wedge depth _____
 20. Depth under wedge _____
 21. Total slot depth _____
 22. Slot width _____

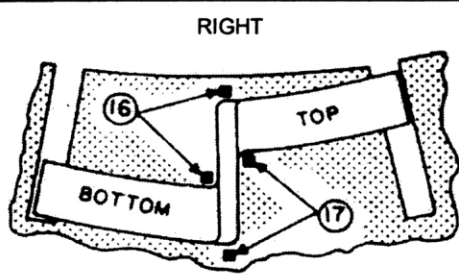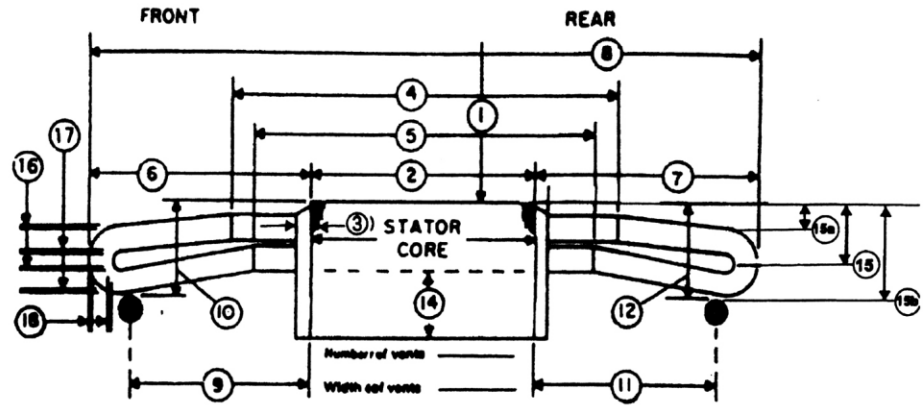

VIEW FROM CONNECTION END

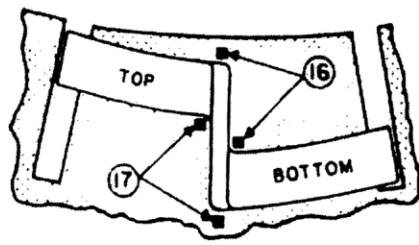

LEFT


SKEWED SLOT Yes No
 SKEW DISTANCE _____

 RIGHT
 LEFT

SPECIAL FEATURES: (please mark all boxes)	Yes	No
Tin leads	<input type="checkbox"/>	<input type="checkbox"/>
1/4 Twist inner lead	<input type="checkbox"/>	<input type="checkbox"/>
Terrace wound	<input type="checkbox"/>	<input type="checkbox"/>
Taped leads	<input type="checkbox"/>	<input type="checkbox"/>
Corona shield	<input type="checkbox"/>	<input type="checkbox"/>
Knuckle lift critical	<input type="checkbox"/>	<input type="checkbox"/>
End bell clearance is tight	<input type="checkbox"/>	<input type="checkbox"/>
RTD's	<input type="checkbox"/>	<input type="checkbox"/>
Slot liner in use. Size _____	<input type="checkbox"/>	<input type="checkbox"/>

INSULATION CLASS:

-F (DIP/BAKE)	-HERMETIC
-VPI	-SEALED



Dimensions to nearest thousandth of inch

REMARKS: _____
